





NOTES

This manual provides information on the proper use and storage of the product and accessories, and assists the user in dealing with questions about their use and in understanding the safety precautions to be taken.

PLEASE READ CAREFULLY

When handing the product over to another person, be sure to include this anual, heed all warnings and follow all instructions in the manual.

2 YEAR WARRANTY DESCRIPTION

e warranty, which applies to all purchasers from our authorised dealers, vers any defects caused by production, as well as failures in the course of ormal use, excluding physical damage, natural disasters (fire, flood, earthquake htning, etc.) and chemical corrosion, unauthorised repairs, replacement of mponents during handling, collisions at the site of the installation and other lures due to human or force majeure reasons. and damage, or the manual y malfunction caused by acts expressly prohibited by the instruction manual

ACCESSORY DESCRIPTION


lobile phone clip, camera frame, hand screws and other accessories are consumables (not in the 2-year warranty), after use, please confirm whether there is aging, damage and other conditions of this phenomenon is normal wear and tear, in order to use the convenience of please contact the dealer in time to buy new parts replacement!

MAINTENANCE METHODS

Please use a soft sponge, soft cloth, dry cloth to clean the product regularly, do not use bleach, wire ball wipe, wipe clean and keep the product dry.

1

For more information on LENSGO product features, Please visit WWW.lensgo.net

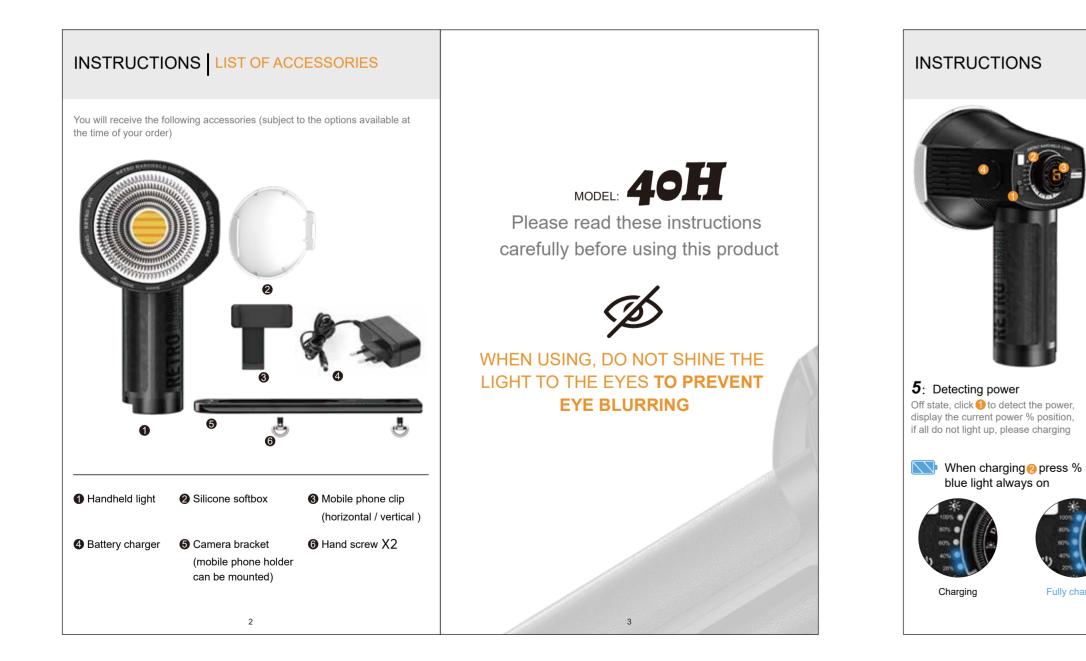

INSTRUCTIONS

onstant light, mobile phone / camera can be used!

- 2700K 7000K DUAL COLOUR TEMPERATURE
- WITH SILICONE SOFTBOX
- 0%-100% BRIGHTNESS ADJUSTABLE rning the adjustment knob, the ntness change range is 0-100%.

SPECIFICATION

MODEL:	40H
TYPE:	COB 40W
Colour temperature:	2700K-70
Jadeite thumb ring:	≥ 96
Batteries:	4 x 18650
Charging Voltage:	12V 2A
Duration of use:	Approx. 1 (when used at
Adjustment range:	Brightness
Number of beads:	Total 192
Bead Voltage:	36 ~ 68V
Bead Current:	1100mA



